




NT 65/2 Tact²

High capacity, high filtration professional multi-purpose vacuum cleaner with twin motors and Tact² automatic filter clean system for heavy duty dust extraction.




1 Easy transport

- Adjustable push handle and large wheels make transport easy even on uneven surfaces.




2 Smart accessory storage

- For example, the floor tool can be quickly fixed any way round.



3 Automatic Filter Cleaning System Tact²

- This divided flat pleated filter is cleaned by air blasts and can be removed from the clean side.
- Fine dusts cannot block the filter. A constant high air flow is maintained.



4 Practical storage

- On-board practical storage for tools, small items and bottles.



NT 65/2 Tact²

- Automatic Filter Cleaning System Tact²
- Antistatic system
- Adjustable push handle

Technical data

Order no.	1.667-286.0	
EAN code	4039784714953	
Current type	Ph / V / Hz	1 / 220 - 240 / 50 - 60
Air flow	l/s	2 x 74
Vacuum	mbar / kPa	254 / 25,4
Container content	l	65
Container material		Plastic
Rated input power	W	max. 2760
Standard nominal size		DN 40
Cable length	m	10
Sound pressure level	dB(A)	73
Quantity of motors		2
Weight	kg	24,5
Weight incl. packaging	kg	31,33
Dimensions (L x W x H)	mm	575 x 490 x 880


Equipment

Suction hose	m	4 / electrically conductive	Sturdy bumper	■
Suction Tube	piece(s) x m / mm	2 x 0,55 / 40 / Stainless steel	Push handle	■
Filter bag	piece(s)	1 / Paper	Safety class	I
Wet and dry floor tool	mm	360	Caster with brake	■
Crevice nozzle	■			
Drain hose (oil-resistant)	■			
Auto shutdown when max. level is reached	■			
Antistatic system	■			
Eco filter system	■			
Flat pleated filter		Paper		
Filter cleaning		Tact Filter CleanTact Filter Clean-Tact Filter CleanTact Filter Clean		

■ Included in delivery.

NT 65/2 TACT²

1.667-286.0

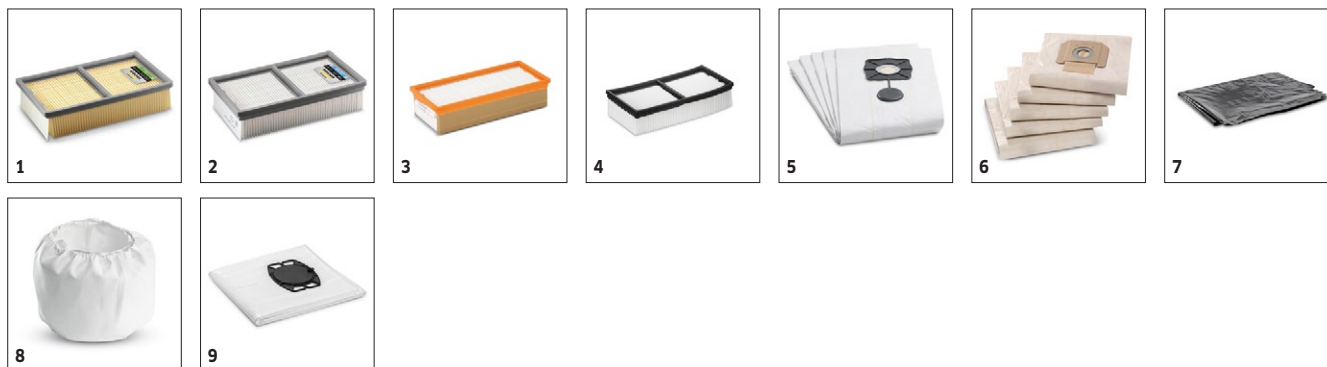
KÄRCHER


		Order no.	Quantity				Price	Description	
Flat pleated filter (paper)									
Flat pleated filter (paper)	1	6.907-276.0	1 piece(s)					Paper, dust class M.	■
Flat pleated filter (PES)									
Flat pleated filter (PES)	2	6.907-277.0	1 piece(s)					Polyester fleece, rot-proof, dust class M.	■
Flat pleated filter HEPA, dust class H									
HEPA surface filter	3	6.904-364.0	1 piece(s)					HEPA surface filter, dust class H (H 14).	□
Flachfaltenfilter (PTFE)									
Flat pleated filter, PTFE	4	6.907-449.0	1 piece(s)						□
Special filter bags, wet filter bags									
Special filter bags, wet filter bags	5	6.904-252.0	5 piece(s)						□
Paper filter bags									
Paper filter bags	6	6.904-285.0	5 piece(s)					Dust class M, 3-ply, reinforced outer ply, tear-resistant.	□
Plastic sacks for dust-free disposal									
Plastic bag for dust-free disposal	7	6.900-698.0	10 piece(s)					PE plastic sack. Plastic sacks for dust-free disposal.	□
Membrane filter / fabric filter									
Membrane filter	8	6.904-282.0	1 piece(s)					Polyester needle fleece, dust class M, washable (40 °C). Not suitable for dust class H.	□
Fleece filter bags (3 ply)									
Fleece filter bags	9	2.885-753.0	5 piece(s)						□

■ Included in delivery. □ Available accessories.

NT 65/2 TACT²


1.667-286.0

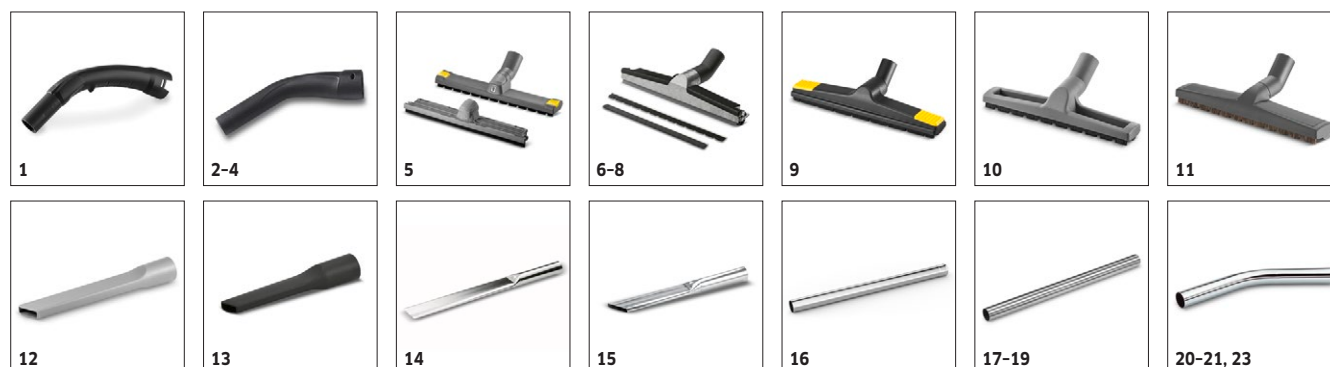KÄRCHER


		Order no.	Quantity	ID	Length	Width	Price	Description	
Plastic bend									
Elbow electrically conducting packaged N	1	2.889-172.0	1 piece(s)	DN 40					■
Plastic bend	2	5.031-718.0	1 piece(s)	DN 35				Plastic with C-35 clip system.	□
	3	5.031-939.0	1 piece(s)	DN 35				Plastic ID 35 with C-35 clip system, electrically conductive.	□
	4	5.032-427.0	1 piece(s)	DN 40				Plastic with C-40 clip system, electrically conductive.	□
All-purpose nozzles (wet/dry)									
Floor tool packaged NW40 360mm	5	2.889-153.0	1 piece(s)	40		360 mm			■
Floor tool DN40-370	6	6.903-018.0	1 piece(s)	40		370 mm		Aluminium with height-adjustable rollers, brush strips (6.903-064.0) and squeegees (6.903-081.0, oil-resistant).	□
Floor tool neutrally DN40	7	6.906-383.0	1 piece(s)	40		450 mm		Aluminium with height adjustable rollers, brush strips (6.903-065.0) and squeegees (6.906-146.0).	□
Floor tool neutrally DN35	8	6.906-384.0	1 piece(s)	35		370 mm		Aluminium with height adjustable rollers, brush strips (6.903-064.0), squeegees (6.903-081.0, oil-resistant).	□
Wet and dry floor nozzle	9	2.889-117.0	1 piece(s)	40		400 mm			□
Floor tool anthracite packaged NW35	10	2.889-173.0	1 piece(s)	35		300 mm			□
Floor tool anthracite packaged NW40	11	2.889-174.0	1 piece(s)	40		360 mm			□
Crevice nozzles									
Crevice nozzle DN 40 300mm 1:50	12	5.130-655.0	1 piece(s)	DN 40					■
Crevice nozzle DN35	13	6.900-385.0	1 piece(s)	DN 35	210 mm			Plastic.	□
Crevice nozzle	14	6.900-922.0	1 piece(s)	35	500 mm			Metal.	□
Crevice nozzle DN40	15	6.905-817.0	1 piece(s)	40	400 mm				□
Suction tubes stainless steel									
Set suction tube stainless steel NW40 55	16	2.889-194.0	2 piece(s)	40	550 mm				■
Suction tube, ID 40	17	6.902-081.0	1 piece(s)	40	500 mm			For use in wet, damp environments or for wet vacuuming.	□
Suction tube	18	6.906-531.0	1 piece(s)	40	1000 mm				□
Suction tube, DN 35	19	6.902-154.0	1 piece(s)	35	500 mm			Mainly for wet vacuuming or vacuuming corrosive media.	□
Bend stainless									
Bend, stainless steel ID 35	20	6.903-141.0	1 piece(s)	DN 35				Stainless steel.	□
Bend, stainless steel ID 40	21	6.902-079.0	1 piece(s)	DN 40					□
Bend metal									
Bend, DN 35, metal	22	6.900-519.0	1 piece(s)	DN 35				Metal, ID 35.	□
Bend, DN 40, metal	23	6.900-276.0	1 piece(s)	DN 40				Metal, ID 40.	□
All-purpose brushes									
All-purpose brush	24	6.903-863.0	1 piece(s)	35	120 mm			Natural bristles (ox hair), bristle element 120 x 45 mm, ID 35.	□
Car cleaning nozzles									
Car nozzle	25	6.900-952.0	1 piece(s)	DN 40		90 mm		Plastic.	□
Rubber suction tools, nose 45°									
Rubber suction tools, nose 45°	26	6.902-104.0	1 piece(s)	35	220 mm			For vacuuming machines, oil-resistant.	□
	27	6.902-105.0	1 piece(s)	40	220 mm			For vacuuming machinery, oil-resistant.	□
Pipe dusting nozzles									
BRUSH	28	6.903-035.0	1 piece(s)	35				Plastic, tube diameter 100 mm.	□
	29	6.903-036.0	1 piece(s)	35				Plastic, tube diameter 200 mm.	□

■ Included in delivery. □ Available accessories.

NT 65/2 TACT²
1.667-286.0



		Order no.	Quantity	ID	Length	Width	Price	Description	
Suction tubes metal									
Suction tube DN35	30	6.900-514.0	1 piece(s)	35	500 mm			Metal, chromium-plated.	☐
Set suction tube chromed NW35 550mm	31	2.889-191.0	2 piece(s)	35	550 mm				☐

■ Included in delivery. □ Available accessories.

NT 65/2 TACT²

1.667-286.0

KÄRCHER


		Order no.	Quantity	ID	Length		Price	Description	
Suction hoses (Clip-system)									
Suction hose	1	6.906-321.0	1 piece(s)	40	4 m			With bayonet and clip connection, C 40.	■
Suction hose (clip system), C 40, 10 m	2	6.906-279.0	1 piece(s)	DN 40	10 m			With bayonet and clip connection, C 45	□
Suction hose	3	6.906-714.0	1 piece(s)	DN 40	4 m			With bayonet and clip connection, C 45.	□
Suction hose (Clip-system), C 40, 16 m	4	6.906-635.0	1 piece(s)	DN 40	16 m			With bayonet and clip connection, C 40	□
Suction hose (clip system), C 40, 10 m, el.	5	6.906-877.0	1 piece(s)	DN 40	10 m			With bayonet and clip connection, electrically conductive, C 40	□
Suction hoses complete (Clip-system)									
Electrically conductive suction hose	6	2.889-141.0	1 piece(s)	DN 40	4 m				■
Suction hose	7	4.440-678.0	1 piece(s)	DN 40	4 m			With bend, C DN-40.	□
Suction hose complete (Clip-system), C ID 40, 4 m, el.	8	4.440-728.0	1 piece(s)	DN 40	4 m			With bend and module (4.060-533.0), electrically conductive.	□
Electrically conductive suction hose	9	2.889-137.0	1 piece(s)	DN 35	4 m				□
Suction hose	10	2.889-138.0	1 piece(s)	DN 40	4 m				□
	11	2.889-139.0	1 piece(s)	DN 40	2,5 m				□
Suction hose, oil-resistant	12	2.889-140.0	1 piece(s)	DN 40	4 m				□
Electrically conductive suction hose	13	2.889-142.0	1 piece(s)	DN 40	2,5 m				□
Suction hose	14	2.889-161.0	1 piece(s)	DN 35	2 m				□
Repair kits									
Repair set, C 40	15	2.639-873.0	1 piece(s)	C- 40				Suction hose repair kit (clip system).	□
Repair kit ID 61	16	2.862-038.0	1 piece(s)	DN 61				Suction hose repair kit.	□
Repair set NW40	17	2.889-150.0	1 piece(s)	DN 40					□
Suction hoses complete									
Suction hose, complete	18	4.440-264.0	1 piece(s)	DN 61	4 m			Plastic, EVA	□
Suction hose complete, ID 61, smooth inside	19	4.440-328.0	1 piece(s)	DN 61	3 m			Industrial hose, PVC / elastomer with steel spiral, smooth inside.	□
Suction hose, complete, DN 61, 10 m	20	4.440-467.0	1 piece(s)	DN 61	10 m			Plastic, EVA	□
Suction hose complete, ID 61, 4 m, oil-resistant	21	4.440-613.0	1 piece(s)	DN 61	4 m			Oil-resistant.	□
Suction hose complete, ID 61, 4 m, el.	22	4.440-616.0	1 piece(s)	DN 61	4 m			Electrically conductive.	□
Suction hose, complete	23	4.440-263.0	1 piece(s)	DN 40	4 m			Standard, plastic.	□
Suction hose complete, ID 40, 4 m, oil-resistant,	24	4.440-303.0	1 piece(s)	DN 40	4 m			Oil-resistant.	□
Suction hose, complete	25	4.440-463.0	1 piece(s)	DN 40	10 m			Standard, plastic.	□
Suction hose complete	26	4.440-466.0	1 piece(s)	DN 40	10 m			Electrically conductive, plastic.	□
Suction hose complete, ID 40, 10 m, oil-resistant	27	4.440-612.0	1 piece(s)	DN 40	10 m			Oil-resistant.	□
Hose connection									
Adapter, DN 32/35, with internal thread	28	6.902-077.0	1 piece(s)	DN 32				For connecting 2 suction hoses (not ESB 28 and 34).	□
Adapter, DN 40 with internal thread	29	6.900-286.0	1 piece(s)	DN 40				For connecting 2 suction hoses, threaded at both ends.	□
Extension hoses (Clip-system)									
Extension hose, C 40	30	6.906-344.0	1 piece(s)	DN 40	2,5 m			For all C-40 hoses.	□

■ Included in delivery. □ Available accessories.

NT 65/2 TACT²
1.667-286.0




		Order no.	Quantity	ID	Length		Price	Description	
Extension hose packaged NW40 2.5m	31	2.889-146.0	1 piece(s)	DN 40	2,5 m				☐

■ Included in delivery. ☐ Available accessories.

NT 65/2 TACT²

1.667-286.0

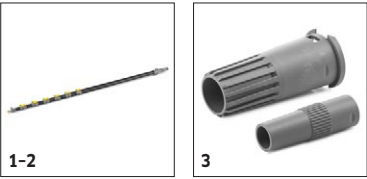

		Order no.	Flow Rate	Water feed temperature	Length	Length	Price	Description	
Telescopic									
Telescopic lance TL 10 H	1	4.762-611.0		max. 60 °C				Up to 10 m reach: hybrid telescopic lance TL 10 H. Comprising carbon-glass fibre mix and suitable for multifunctional use. Simple retraction and extension thanks to quick-release fasteners.	☐
Telescopic lance TL 10 C	2	4.762-612.0		max. 60 °C				Carbon fibre telescopic lance TL 10 C. With up to 10 m reach and practical quick-release fasteners. Multifunctional use for cleaning facades, windows or solar panels.	☐
TL vacuum cleaner adapter	3	9.751-306.0						TL suction cup for 10 and 14 m long telescopic lances comprising suction bend connection (DN 35, DN 40) and connection for the suction nozzles.	☐

■ Included in delivery.
 ☐ Available accessories.

NT 65/2 TACT²

1.667-286.0

KÄRCHER


		Order no.	Quantity	ID			Price	Description	
Y-adapter kit									
Y-adapter kit	1	2.637-217.0	1 piece(s)	35				Distributor, plastic.	☐
Connecting sleeve C-DN (clip on taper), EL (electroconductive)									
C-ID 35 adapter	2	5.407-112.0	1 piece(s)	35				C 35 hose connector for ID 35 accessory, electrically conductive.	☐
C 40 adapter	3	5.407-109.0	1 piece(s)	C-DN 40				C 40 hose connector for ID 35 accessory, electrically conductive.	☐
C-DN 40 adapter	4	5.407-111.0	1 piece(s)	40				C 40 hose connector for DN 40 accessory, electrically conductive.	☐
Connection cone NW35	5	5.407-005.0							☐
Connection cone NW40	6	5.407-006.0		DN 40					☐
Adapter for electric power tools, clip on, el.									
Sleeve for tool C35EL	7	5.453-042.0	1 piece(s)	35				Plastic, adjustable from DN 26-36 (Te/Eco M/H), electrically conductive.	☐
Adapter for electric power tools, C 35, el.	8	5.453-048.0	1 piece(s)	35				Inside Ø 25.4 mm, outside Ø 34.6 mm / 38 mm, electrically conductive.	☐
	9	5.453-050.0	1 piece(s)	35				Inside Ø 27 mm, outside Ø 36.5 mm/38.8 mm, electrically conductive.	☐
Adapter for electric power tools, screwable									
Power tool adapter, threaded, DN 35	10	5.453-016.0	1 piece(s)	35				Plastic, adjustable from DN 26-36.	☐
Adapter for electric power tools, screwable, ID 35	11	5.453-026.0	1 piece(s)	35				Inside Ø 28.6 mm, outside Ø 37.3/38.8 mm.	☐
Power tool adapter, threaded, DN 35	12	6.902-059.0	1 piece(s)	35				Inside Ø 32 mm, outside Ø 39 mm.	☐
	13	6.902-095.0	1 piece(s)	35				Inside Ø 28 mm, outside Ø 34/38.8 mm, electrically conductive.	☐
Adapter (tube -> nozzle)									
Adapter	14	5.453-019.0	1 piece(s)	40				From ID 40 to 61, plastic.	☐
Reducing sleeves									
Reducer	15	5.407-108.0	1 piece(s)	40				C-40 hose with 35 external thread for threaded adapter, DN 35.	☐
Sleeve C40 / C35	16	5.407-113.0	1 piece(s)	40				Reducer from C-40 clip to C-35 clip.	☐
Reducer (tube -> nozzle)									
Reducer	17	6.902-017.0	1 piece(s)	40				From ID 40 to ID 35, plastic.	☐
Reducer from ID 35 to 32	18	6.902-072.0	1 piece(s)	35				From ID 35 to 32, metal.	☐
Set reducing / extension sleeves									
Set reducing / extension sleeves	19	2.860-117.0	1 piece(s)					ID 40/35, ID 35/32 (tube -> nozzle), plastic.	☐

■ Included in delivery. □ Available accessories.

NT 65/2 TACT²
1.667-286.0



		Order no.	ID					Price	Description	
Target group specific vacuum cleaner accessory sets										
Car cleaning kit	1	2.862-166.0	DN 35						Car cleaning kit	☐
NT vacuum cleaner kit, DN 40, el.	2	2.638-147.0	DN 40						Wet and dry vacuum kit (electrically conductive)	☐

■ Included in delivery. □ Available accessories.

NT 65/2 TACT²
1.667-286.0



		Order no.	Quantity	Width			Price	Description	
Other									
CS 40 Me	1	2.863-026.0	1 piece(s)						☐
Adapter connection old elektr. leitend	2	5.031-436.0							☐

■ Included in delivery. □ Available accessories.

NT 65/2 TACT²
1.667-286.0



		Order no.	Quantity	ID	Length	Width	Price	Description	
UBS non-conductive media									
Add-on kit nonconducting media NT Tact ²	1	2.642-602.0	1 piece(s)					For switching off when vacuuming non-conductive fluids such as oils and greases	☐

■ Included in delivery. ☐ Available accessories.

NT 65/2 TACT²
1.667-286.0



		Order no.	Quantity	ID	Length / width	Price	Description	
Shaving baskets								
Chip sieve	1	5.731-645.0					Plastic, perforated, with internal thread . Protects drain hose from coarse chip, etc.	☐

■ Included in delivery. ☐ Available accessories.